

EURO CARGO MLI20



PERFECT IN EVERY SITUATION

**IVECO**

# EURO CARGO MLI20



## COMFORT & ERGONOMICS

SPACIOUS CAB WITH NUMEROUS STORAGE COMPARTMENTS.  
ISRI AIR SUSPENDED DRIVERS SEAT.  
EASY TO REACH CONTROLS



## HANDLING

SUPERIOR TURNING CIRCLE  
ECAS AIR SUSPENSION FOR A SMOOTH RIDE



## VERSATILITY

MANUAL, AUTOMATIC OR AUTOMATED TRANSMISSIONS.  
DAY OR SLEEPER CAB



## EFFICIENCY

SUPERIOR FUEL EFFICIENCY  
80,000KM ENGINE OIL SERVICE INTERVALS



## SAFETY

AIR BRAKING WITH ESP,  
ABS AND ASR




## P E R F O R M A N C E

**5.88 LITRE IVECO TECTOR EURO 5 ENGINE**

HIGH PRESSURE COMMON RAIL ELECTRONIC INJECTION

**TURBO CHARGED & INTERCOOLED 24 VALVE FOUR STROKE DIESEL**

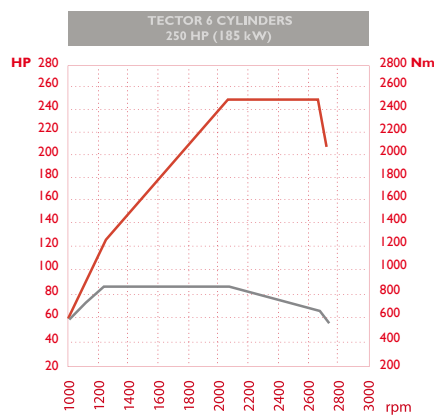

**ENGINE** IVECO Tector F4A E25 5.88 litre 6 cylinder

<b>Maximum output</b>	185 kW (250 hp) @ 2,500 rpm	<b>Governed speed</b>	2,700 rpm
<b>Maximum torque</b>	850 Nm (627 lb/ft) @ 1,250-2,100 rpm	<b>Emission standard</b>	EURO 5
<b>SCR</b>	Selective Catalytic Reduction		



## COMFORT & ERGONOMICS

ERGONOMICALLY DESIGNED DASHBOARD,

SUPERIOR COMFORT WITH AIR SUSPENDED ISRI DRIVER'S SEAT

TWO CAB VERSIONS

ADJUSTABLE STEERING WHEEL AND CONTROLS AT YOUR FINGERTIPS



## WARRANTY


36 MONTHS\* / 250,000 KM / 100% PARTS AND LABOUR

This warranty commences on the earlier of the date of delivery of the truck to the Purchaser or the date of registration of the Vehicle.  
This warranty ends on the earliest of the expiry of the duration, kilometres or hours.

Terms and Conditions apply, please see [www.iveco.com.au](http://www.iveco.com.au) for further details.



# EURO CARGO MLI20

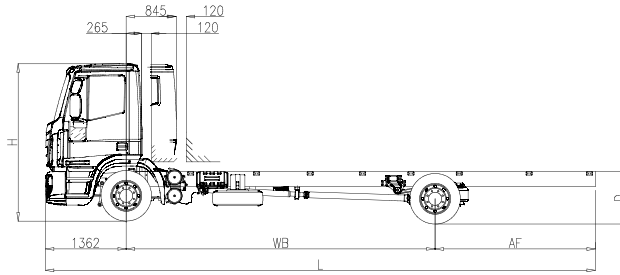

## CHASSIS DIMENSIONS (Dimensions in mm)

Cab	Sleeper	Day
WB	5670	5175
AF	3000	2685
L	10032	9222
H	2668	2668
D (Unladen)	884	884
Turning circle*	19260	17740

\*For wall to wall, add 1180mm

## TRANSMISSION

ZF 6S800 six-speed manual synchromesh transmission cable gear shift,  
1st 6.58:1  
2nd 3.60:1  
3rd 2.12:1  
4th 1.39:1  
5th 1.00:1  
6th 0.78:1  
Reverse 6.08:1

### Optional Transmissions:

ZF 6AS800 automated transmission  
Allison S3000 automatic transmission

## STEERING

**Type:** Power-assisted with gear-driven pump  
Tilt-adjustable 470mm diameter steering wheel

## CLUTCH

**Type:** Single-plate push type with air over hydraulic assistance  
**Diameter:** 395mm

## FRONT AXLE & SUSPENSION

IVECO 5860

**Capacity:** 4,480kg

**Suspension:** Parabolic springs with dual-action hydraulic shock absorbers and stabiliser bar fitted

## REAR AXLE & SUSPENSION

Meritor MS10-144

Differential lock standard on manual transmission, option on automatic

**Capacity:** 8,480kg

**Ratio:** 3.90:1

**Suspension:** Two bellows, rear air bag suspension with dual shock absorbers  
Electronically Controlled Air Suspension (ECAS) including dual-rear levelling valves

## CHASSIS

**Type:** Bolted and riveted parallel channel

**Size:** 253.4 x 70 x 6.7mm (255.4 x 70 x 7.7mm on 5.67m Wheelbase)

**Width:** 853mm

## EURO CARGO TARE WEIGHTS

Cab	Sleeper	Day
Wheelbase	5670mm	5175mm
Front Tare	3170kg	3050kg
Rear Tare	1550kg	1490kg
Total Tare	4670kg	4540kg
GVM	12000kg	12000kg
GCM	12000kg	12000kg

All weights with oil, coolant, spare wheel and tyre but not fuel. Subject to manufacturer's tolerance of + or -2%.

## BRAKES

2 circuit air system with ESP, ASR & ABS  
377 x 45mm ventilated front/rear disc brakes with floating calipers  
Spring-actuated park brake acting on rear wheels  
Exhaust brake  
Air dryer

## FUEL SYSTEM

1 x 280L square alloy tank  
Fuel prefilter with water separator  
1 x 25L tank of AdBlue

## ELECTRICAL

**Type:** 24V

24V-12V converter in cab

**Alternator capacity:** 28V, 90 amp

**Starter:** 24V, 4.0 kW

**Battery:** 2 x 12V - 110 Ah

Automatic battery isolation switch

## WHEELS & TYRES

**Stud and pattern:** M22, 8 x 275mm

PCD steel disc rims

**Disc size:** 19.5" x 6.75"

**Tyres:** 265/70R19.5 tubeless radial

## CAB

**Type:** Forward-control (MLC) Day cab treated with anti corrosion protection

**Option:**

(MLL) Sleeper cab low roof with bunk, curtains, reading lamp, roof hatch and two internal and one external lockers

**Bunk dimensions:** 1900 x 605 x 95mm

Cab colour bumper

**Front Cab Suspension:** Two coil springs, shock absorbers and torsion bar

**Rear Cab Suspension:** Two units with coils springs

Hydraulic cab tilt to 60 degrees.

## FEATURES

- External sunvisor
- Lift-up front panel for daily checks
- Fully-adjustable Isringhausen driver's air-suspension seat with headrest
- Dual bench-passenger seat with fold-down central oddments tray
- 2 x lap-sash seat belts for outboard positions, 1 x lap seat belt for centre position
- AM/FM radio, CD player
- 90-degree opening doors
- Left and right hand entry assist handles
- Remote Central Locking
- Cruise control
- Stowage compartment in overhead console, both doors and rear cab wall
- 2-speed wipers with intermittent control
- Courtesy and map lamps
- Electric horn
- 12-volt power socket (10 amp)
- Electrically operated driver and passenger side windows
- Aerodynamic, remote-control heated mirrors with a convex, spotter and over-the-kerb mirror on the left-hand side
- Air conditioning

## INSTRUMENTATION

Electronic anti-glare instrument panel.

**Gauges:** Speedometer, odometer with trip meter, tachometer, water temperature, fuel level, oil pressure and air pressure.

**Warning lamps:** Power-steering circuit failure, front and rear brake wear, high water temperature, air-cleaner restriction, cab unlatched, low alternator charge, high beam, exterior lights on, hazard warning lights on, low oil pressure, reserve fuel, park brake on, water in pre-filter, brake system failure.

**LCD information panel:** System diagnostics, lighting system check, area level indicator, programmable maintenance scheduling, digital clock, trip 1&2 computer, fuel consumption indicator and ambient temperature.

# IVECO